DC CAPACITIVE PROXIMITY RING SWITCH(6mm)

Diameter of Ring	6mm		6mm	
Shielded/non-Shielded	Non-Shielded		Non-Shielded	
Switching Distance, Sn mm	20mm		20mm	
Housing Material	PBT		PBT	
With LED/Without LED	With LED		With LED	
Picture				
Operating Voltage and Ripple	10-30VDC(Ripple<10%)		10-30VDC(Ripple<10%)	
Sensitivity	Adjustable		Adjustable	
No Load Current	≤15mA		≤15mA	
Max. Load Current	200mA		200mA	
Leakge Current	≤10μA		≤10μA	
Object speed	Not sultable for detecting fast object		Not sultable for detecting fast object	
Mini. Load Current	-		-	
Voltage Drop	≤1.5V at 200mA		≤1.5V at 200mA	
Adjustment	Muti-turn-pot		Muti-turn-pot	
Pulse Duration	-		-	
Switching Hysteresis	<15%(Sr)		<15%(Sr)	
Repeat Accuracy	<2.0%(Sr)		<2.0%(Sr)	
Protection Category	IP67		IP67	
Operating Temperature	-25 ℃ - +70 ℃		-25 ℃ - +70 ℃	
Temperature Drift	<15%(Sr)		<15%(Sr)	
Min. Target	Diameter 5mm, Length 4mm		Diameter 5mm, Length 4mm	
Reverse Polarity Protection	YES		YES	
Short Circuit Protection	YES		YES	
Overload Trip Point	220-280mA		220-280mA	
EMC	RFI>3V/M; EFT>1KV; ESD>4KV(contact)		RFI>3V/M; EFT>1KV; ESD>4KV(contact)	
Shock/Vibration	IEC60947-5-2 Part 7.4.1 and Part 7.4.2		IEC60947-5-2 Part 7.4.1 and Part 7.4.2	
DC 3 wire 10-30V NPN N.O.	C1P2-R0620N-O3A2	1	C1P2-R0620N-OEA4	31
DC 3 wire 10-30V NPN N.C.	C1P2-R0620N-C3A2	2	C1P2-R0620N-CEA4	32
DC 3 wire 10-30V PNP N.O.	C1P2-R0620P-O3A2	3	C1P2-R0620P-OEA4	33
DC 3 wire 10-30V PNP N.C.	C1P2-R0620P-C3A2	4	C1P2-R0620P-CEA4	34
DC 4 wire 10-30V Changeover PNP (N.O. & N.C.)	C1P2-R0620P-S4A2	6	C1P2-R0620P-SEA4	36
DC 4 wire 10-30V Changeover NPN (N.O. & N.C.)	C1P2-R0620N-S4A2	5	C1P2-R0620N-SEA4	35
DC 2 wire 10-60V N.O.	-		-	
DC 2 wire 10-60V N.C.	-		-	
NAMUR	-		-	
	-		-	
	-		-	
	-		-	
	-		-	
	-		-	
Wiring diagram number				
Dimensions (unit: mm)	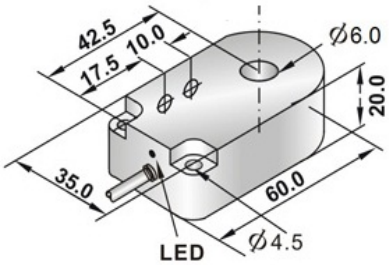		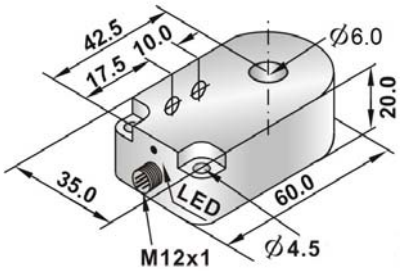	
Cable 2M (PVC)	4φ 3x0.15		M12 Euro-style	
Weight	approx.97g		approx.50g	

Subject to modifications without notice

Tel: +86-755-2646 7962 Fax: +86-755-2646 7925 MSN: dfan852@hotmail.com
Web: www.mountiger.com E-mail: sales@mountiger.com QQ: 873764592

Mountiger Sensing the future