

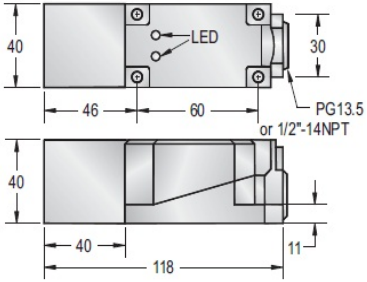
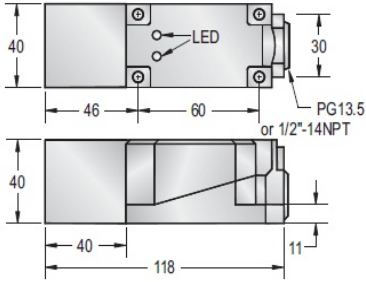


NAMUR INDUCTIVE PROXIMITY SWITCH(Q40)

Diameter	Q40		Q40	
Shielded/non-Shielded	Shielded		Non-Shielded	
Switching Distance Sn mm	15mm		30mm	
Housing Material	PBT		PBT	
With LED/Without LED	With LED		With LED	
Picture	 CE		 CE	
Operating Voltage	6-12VDC		6-12VDC	
Ripple	-		-	
No Load Current	<1.1mA(OFF) / > 2.2mA(ON)		<1.1mA(OFF) / > 2.2mA(ON)	
Switching Frequency	100HZ		100HZ	
Response Time	0.5ms/0.5ms / 1ms/1ms		0.5ms/0.5ms / 1ms/1ms	
Switching Hysteresis	<15%(sr)		<15%(sr)	
Repeat Accuracy	-		-	
Protection Category	IP67		IP67	
Operating Temperature	-25 °C - +75 °C		-25 °C - +75 °C	
Temperature Drift	< 2%(sr)		< 2%(sr)	
Short Circuit Protection	-		-	
Overload Trip Point	-		-	
Time Delay Before Availability	<10ms		<10ms	
EMC	RFI>3V/M / EFT>1KV / ESD>4KV(contact)		RFI>3V/M / EFT>1KV / ESD>4KV(contact)	
Shock / Vibration	IEC 60947-5-2,Part7.4.1/IEC 60947-5-2,Part7.4.2		IEC 60947-5-2,Part7.4.1/IEC 60947-5-2,Part7.4.2	
Material Active Face	PBT		PBT	
DC 3 wire 10-30V NPN N.O.	-		-	
DC 3 wire 10-30V NPN N.C.	-		-	
DC 3 wire 10-30V PNP N.O.	-		-	
DC 3 wire 10-30V PNP N.C.	-		-	
DC 4 wire 10-30V Changeover PNP (N.O. & N.C.)	-		-	
DC 4 wire 10-30V Changeover NPN (N.O. & N.C.)	-		-	
DC 2 wire 10-60V N.O.	-		-	
DC 2 wire 10-60V N.C.	-		-	
DC 2 wire 6-12V NAMUR	D6P1-Q4015-NA/LED	19	D6P2-Q4030-NA/LED	19
DC 3 wire 10-55v NPN N.C.	-		-	
DC 3 wire 10-55v PNP N.O.	-		-	
DC 3 wire 10-55v PNP N.C.	-		-	
DC 3 wire 5-36V PNP N.C.	-		-	
DC 3 wire 5-36V PNP N.O.	-		-	
DC 3 wire 5-36V NPN N.C.	-		-	
DC 3 wire 5-36V NPN N.O.	-		-	
DC 4 wire 5-36V Changeover PNP (N.O & N.C.)	-		-	
DC 4 wire 5-36V Changeover NPN (N.O & N.C.)	-		-	
Wiring diagram number	↑		↑	
Dimensions (unit: mm)				
Connection	terminal		terminal	
Weight	approx.285 g		approx.285 g	

Subject to modifications without notice

Tel: +86-755-2646 7962

Fax: +86-755-2646 7925

MSN: dfan852@hotmail.com

Web: www.mountiger.com

E-mail: sales@mountiger.com

QQ: 873764592

