





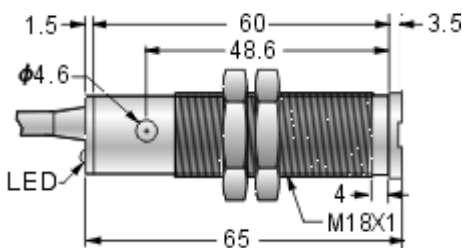
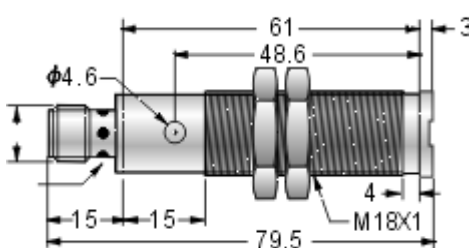


DC WITH MULTIFUNCTIONAL OUTPUT PHOTOELECTRIC SENSOR (FM18B)

Type	FM18B			FM18B		
Sensing Mode	Retro-reflective mode			Retro-reflective mode		
Sensing Picture	 With Polarizing Filters			 With Polarizing Filters		
Switching Distance (Sn)	1M			1M		
Picture						
Nominal Voltage	10-30VDC			10-30VDC		
Residual Ripple	<10%			<10%		
Tolerance	±10%Sn			±10%Sn		
Hysteresis	10%			10%		
Emission	Red(660nm)			Red(660nm)		
Output	NPN or PNP(Programable)			NPN or PNP(Programable)		
Contact	N.O. or N.C.(Programable)			N.O. or N.C.(Programable)		
Max. Output Current	200mA			200mA		
No Load Current	30mA or less			30mA or less		
Voltage Drop(Sensor On)	<2.5V			<2.5V		
Sensitivity Adjustment	Trimmer 1 turn			Trimmer 1 turn		
Response Time	1mS			1mS		
Short Circuit Protection	Yes			Yes		
Electric Protections	Yes			Yes		
Temperature Limits	-25 ~ +55℃			-25 ~ +55℃		
Ambient Humidity	35 to 85% RH			35 to 85% RH		
Light Immunity	>10.000Lux			>10.000Lux		
Protection Degree	IP67			IP67		
Housing Material	PBT Plastic or Nickel Plated Brass			PBT Plastic or Nickel Plated Brass		
Sensing object	D51 Reflector			D51 Reflector		
Brass Housing	Emitter					
	NPN or PNP, N.O. or N.C.	F1BL-M181000DS-R4A2/F-B	A32	F1BL-M181000DS-REA4/F-B	A31	
Plastic Housing	Emitter					
	NPN or PNP, N.O. or N.C.	F1PL-M181000DS-R4A2/F-B	A32	F1PL-M181000DS-REA4/F-B	A31	
Wiring Diagram						
Dimensions (unit: mm)						
Terminal Version	2M PVC (3x0.15mm ²)			M12 Euro Style		
Weight	Approx.112g			Approx. 75g		

Subject to modifications without notice

Tel: +86-755-2646 7962

Fax: +86-755-2646 7925

MSN: dfan852@hotmail.com

Web: www.mountiger.com

E-mail: sales@mountiger.com

QQ: 873764592


 Sensing the future