




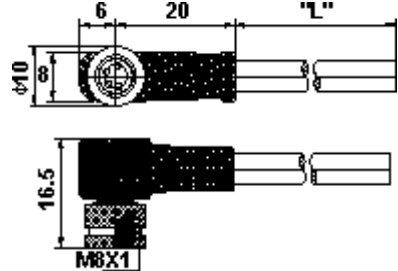


Pico-Style Quick Disconnect Cable Assembly

Diameter		M8 Pico-style	M8 Pico-style
Feature		1.Female Pico-style	1.Female Pico-style
		2.Screw locking with(auto) securing safety nut	2.Screw locking with(auto) securing safety nut
		3.With moulded cable	3.With moulded cable
Picture			
Application Class		HNE acc.to DIN 40040 (-25 °C/+90°C ≤ 75% rF)	HNE acc.to DIN 40040 (-25 °C/+90°C ≤ 75% rF)
moulded body		TPU,self-extinguishing	TPU,self-extinguishing
nominal power		4A	4A
Nominal Voltage		60VAC/75VDC	60VAC/75VDC
Contact		CuZn,Pre-nickeled and 0.8 microns gold-plated	CuZn,Pre-nickeled and 0.8 microns gold-plated
O-Ring		Viton	Viton
Body		TPU,self-exting quishing	TPU,self-exting quishing
Securing Safety nut		Nickel plated brass	Nickel plated brass
Withdrawal Force/Contact		-	-
Water Pressure Resistance		-	-
IP-Rating (IEC60529)		IP68	IP68
Contact Resistance		≤5mΩ	≤5mΩ
Insulation Group		C acc.to VDE 0110	C acc.to VDE 0110
Test Voltage		1.5 KV eff./60s.	1.5 KV eff./60s.
Insulation Resistance		>10 ⁹ Ω	>10 ⁹ Ω
Part_No		PS-FS4WLV022	PS-FA4WLV022
Poles		4	4
Face View female			
Color Code		1=brown 2=White 3=blue 4=black	1=brown 2=White 3=blue 4=black
Conductors	Guage	0.25mm ²	0.25mm ²
	Stranding	32×φ0.10	32×φ0.10
Outer	φmm	φ5	φ5
Jacket	Material	PVC	PVC
Dimensions (unit: mm)			
Remark		Standard Length:2.0m. Other cable length or cable specifications on request	Standard Length:2.0m. Other cable length or cable specifications on request

Subject to modifications without notice

Tel: +86-755-2646 7962

Fax: +86-755-2646 7925

MSN: dfan852@hotmail.com

Web: www.mountiger.com

E-mail: sales@mountiger.com

QQ: 873764592

Mountiger
Sensing the future