




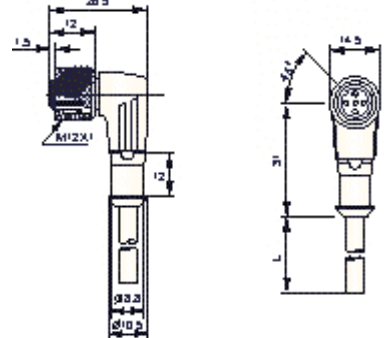


Euro-Style Quick Disconnect Cable Assembly

Diameter		M12 Euro-Style			M12 Euro-Style		
Feature	1.Female Euro-style		1.Female Euro-style				
	2.Screw locking with(auto) securing safety nut		2.Screw locking with(auto) securing safety nut				
	3.With moulded cable		3.With moulded cable				
Picture							
Application Class	HNA acc.to DIN 40040 (-25 °C/+90°C ≤ 100% rF)			HNA acc.to DIN 40040 (-25 °C/+90°C ≤ 100% rF)			
moulded body	TPU,self-extinguishing			TPU,self-extinguishing			
nominal power	4A(CSA=3A)			4A(CSA=3A)			
Nominal Voltage	250VAC/300VDC			250VAC/300VDC			
Contact	CuZn,Pre-nickeled and 0.8 microns gold-plated			CuZn,Pre-nickeled and 0.8 microns gold-plated			
O-Ring	Viton			Viton			
Body	TPU,self-exting uishing			TPU,self-exting uishing			
Securing Safety nut	Nickel plated brass			Nickel plated brass			
Withdrawal Force/Contact	-			-			
Water Pressure Resistance	-			-			
IP-Rating (IEC60529)	IP67			IP67			
Contact Resistance	≤5mΩ			≤5mΩ			
Insulation Group	C acc.to VDE 0110			C acc.to VDE 0110			
Test Voltage	2.0 KV eff./60s.			2.0 KV eff./60s.			
Insulation Resistance	>10 ⁹ Ω			>10 ⁹ Ω			
Part_No	ES-FS4WLV042			ES-FA4WLV042			
Poles	4			4			
Face View female							
Color Code	1=brown 2=White 3=blue 4=black			1=brown 2=White 3=blue 4=black			
Conductors	Guage	0.25mm ²	0.34mm ²	0.25mm ²	0.25mm ²	0.34mm ²	0.25mm ²
	Stranding	32×φ0.10	42×φ0.10	32×φ0.10	32×φ0.10	42×φ0.10	32×φ0.10
Outer	φmm	φ5			φ5		
Jacket	Material	PVC	PVC irradiated	PUR/PVC	PVC	PVC irradiated	PUR/PVC
Dimensions (unit: mm)							
Remark	Standard Length:2.0m. Other cable length or cable specifications on request			Standard Length:2.0m. Other cable length or cable specifications on request			

Subject to modifications without notice

Tel: +86-755-2646 7962

Fax: +86-755-2646 7925

MSN: dfan852@hotmail.com

Web: www.mountiger.com

E-mail: sales@mountiger.com

QQ: 873764592

Mountiger
Sensing the future