



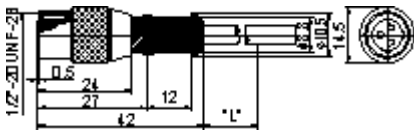
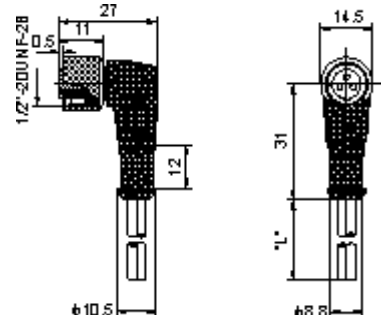


Micro-Style Quick Disconnect Cable Assembly

Diameter		1/2"-20UNF Micro-style	1/2"-20UNF Micro-style
Feature		1.Female Micro-style	1.Female Micro-style
		2.Screw locking with(auto) securing safety nut	2.Screw locking with(auto) securing safety nut
		3.With moulded cable	3.With moulded cable
Picture			
Application Class		HNA acc.to DIN 40040 (-25 °C/+90°C ≤ 100% rF)	HNA acc.to DIN 40040 (-25 °C/+90°C ≤ 100% rF)
moulded body		TPU,self-extinguishing	TPU,self-extinguishing
nominal power		4A	4A
Nominal Voltage		300VAC	300VAC
Contact		CuZn,Pre-nickeled and 0.8 microns gold-plated	CuZn,Pre-nickeled and 0.8 microns gold-plated
O-Ring		Viton	Viton
Body		TPU,self-exting guishing	TPU,self-exting guishing
Securing Safety nut		Nickel plated brass	Nickel plated brass
Withdrawal Force/Contact		-	-
Water Pressure Resistance		-	-
IP-Rating (IEC60529)		IP67	IP67
Contact Resistance		≤5mΩ	≤5mΩ
Insulation Group		C acc.to VDE 0110	C acc.to VDE 0110
Test Voltage		1.5 KV eff./60s.	1.5 KV eff./60s.
Insulation Resistance		>10 ⁹ Ω	>10 ⁹ Ω
Part_No		MS-FS3WLV052	MS-FA3WLV052
Poles		3	3
Face View female			
Color Code		1=green 2=red/black 3=red/white	1=green 2=red/black 3=red/white
Conductors	Guage	0.25mm ²	
	Stranding	26×φ0.13	
Outer	φmm	φ5	
Jacket	Material	PVC	
Dimensions (unit: mm)			
Remark		Standard Length:2.0m. Other cable length or cable specifications on request	Standard Length:2.0m. Other cable length or cable specifications on request

Subject to modifications without notice

Tel: +86-755-2646 7962

Fax: +86-755-2646 7925

MSN: dfan852@hotmail.com

Web: www.mountiger.com

E-mail: sales@mountiger.com

QQ: 873764592

