



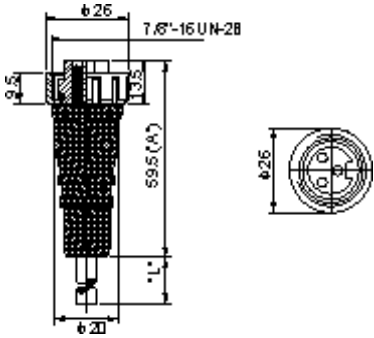
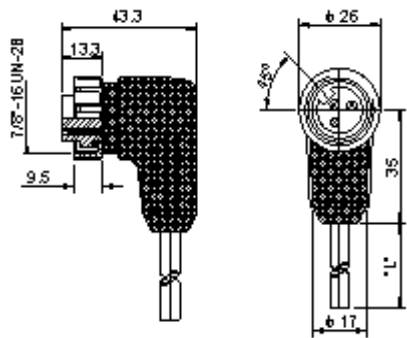


# Mini-Style Quick Disconnect Cable Assembly

Diameter		7/8"-16UN-2A Mini-style	7/8"-16UN-2A Mini-style
Feature		1.Female Mini-style	1.Female Mini-style
		2.Screw locking with(auto) securing safety nut	2.Screw locking with(auto) securing safety nut
		3.With moulded cable	3.With moulded cable
Picture			
Application Class		GAN acc.to DIN 40040 ( -40°C/+90°C/≤100% rF)	GAN acc.to DIN 40040 ( -40°C/+90°C/≤100% rF)
moulded body		TPU,self-extinguishing	TPU,self-extinguishing
nominal power		2~3poles,12A	2~3poles,12A
Nominal Voltage		250VAC	250VAC
Contact		CuZn,Pre-nickeled and 0.8 microns gold-plated	CuZn,Pre-nickeled and 0.8 microns gold-plated
O-Ring		Viton	Viton
Body		TPU,self-exting guishing	TPU,self-exting guishing
Securing Safety nut		-	-
Withdrawal Force/Contact		≥1N	≥1N
Water Pressure Resistance		10bar	10bar
IP-Rating (IEC60529)		IP68	IP68
Contact Resistance		≤5mΩ	≤5mΩ
Insulation Group		C acc.to VDE 0110	C acc.to VDE 0110
Test Voltage		2~3poles,2.5 KV eff./60s.	2~3poles,2.5 KV eff./60s.
Insulation Resistance		>10 <sup>9</sup> Ω	>10 <sup>9</sup> Ω
Part_No		ZS-FS3WLV072	ZS-FA3WLV072
Poles		3	3
Face View female			
Color Code		1=brown 2=black 3=blue	1=brown 2=black 3=blue
Conductors	Guage	0.5mm <sup>2</sup>	
	Stranding	16×φ0.2	
Outer	φmm	φ6.3	
Jacket	Material	PVC	
Dimensions (unit: mm)			
Remark		Standard Length:2.0m. Other cable length or cable specifications on request	Standard Length:2.0m. Other cable length or cable specifications on request

Subject to modifications without notice

Tel: +86-755-2646 7962

Fax: +86-755-2646 7925

MSN: dfan852@hotmail.com

Web: www.mountiger.com

E-mail: sales@mountiger.com

QQ: 873764592

  
Sensing the future